


Every second week Refill food grade grease on the APS7

1. Dismount the closing plugs - position A-B
2. Fix a high pressure grease nipple to position A
3. Press grease into the nipple using a grease gun
4. Fill with grease, till you see that clear clean grease is coming out of the bottom holes - position B and C
5. Re-mount the closing plugs
6. Run the transmission for minimum 45 minutes and then it is ready for use

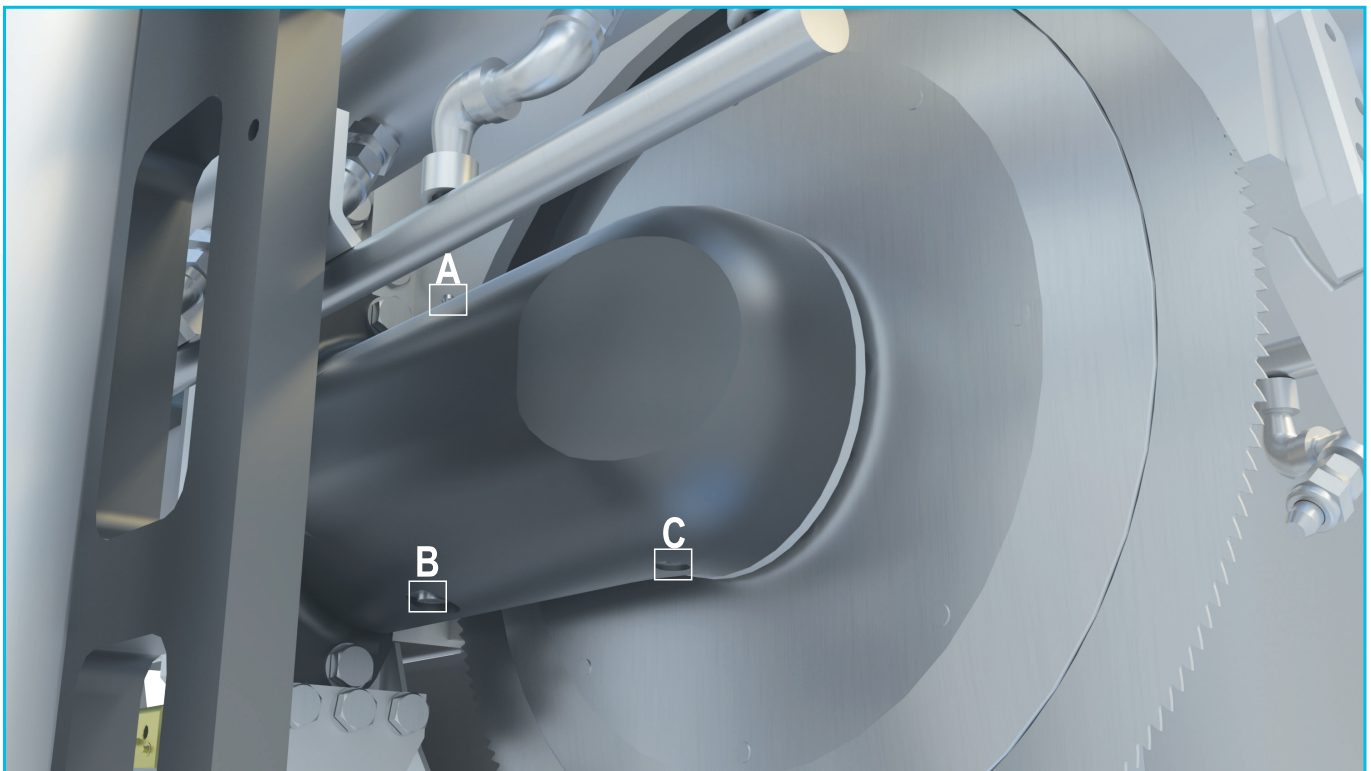

Food grade grease

SLBG-F
Grease for transmission box 290 g

Plugs

VSTI-R1/8ED

Nipple

H1 M6
High pressure, straight for grease lubrication

Contact

Central/Eastern Europe
Phone: +49 252 185 070
E-mail: as.ce@frontmatec.com

Central/Eastern Europe, Poland
Phone: +48 227 345 551
E-mail: as.ce@frontmatec.com

Northern Europe
Phone: +45 36 999 099
E-mail: as.ne@frontmatec.com

Southern Europe
Phone: +34 932 643 800
E-mail: as.se@frontmatec.com

Russia
Phone: +7 495 424 9559
E-mail: as.ru@frontmatec.com

Western Europe
Phone: +31 886 294 000
E-mail: as.we@frontmatec.com