



PORK SOLUTIONS // WHIPPING MACHINE

FLEXIBLE SETUP OPTIMAL RESULT!

With the modular design, the whipping machine can be fitted with a variation of brushes and whippers so it can be configured to serve multi purposes. Each roller is equipped with its own drive unit to control the speed of each step in the process for an optimal result.

Hygiene

The whipping machine conforms to the strictest rules regarding hygiene.

Options

- Placing the machine before the scalding line and dehairing line, the machine can be used as a washing machine, with an optional spray system
- Placing the machine before the flame-off singeing, the machine can be used as a dry whipping and polishing machine
- Finish on the hind toes and hind legs with separate machine, head and hind toe brushing machine
- Before entering the dressing line, the machine can be used as a final polisher.

Pre-Conditions

The whipping machine conforms to the strictest rules regarding hygiene.




Safety and Legal Requirements

The whipping machine is CE approved and designed to meet the strictest demand on health and safety.



Value for you!

- Modular setup for multiple uses
- Individually controlled roller speeds
- High hygiene compliance
- Supports wet and dry processing
- Better polishing before dressing line
- Durable stainless steel cabin design
- Meets strict safety regulations

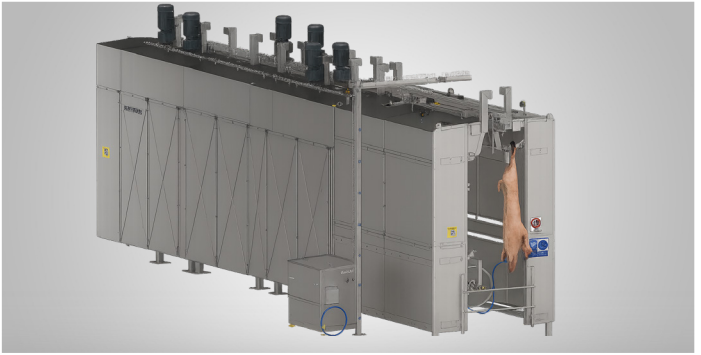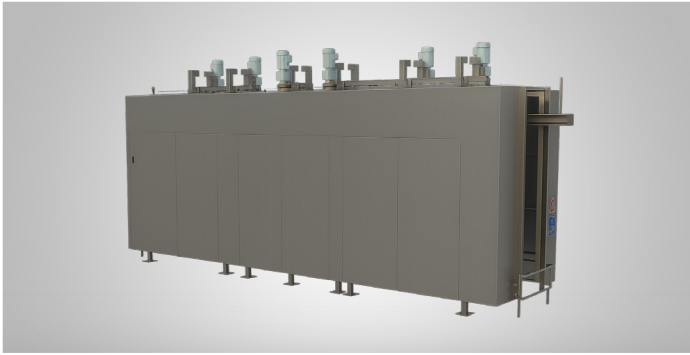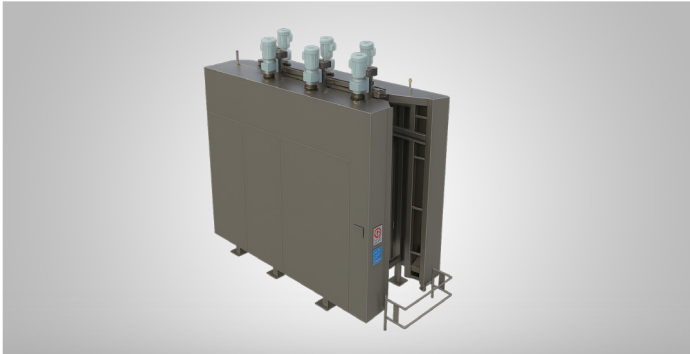

Whipping setup with 6 vertical whippers
Whipping setup with 6 vertical and 6 horizontal whippers

Head and hind toe brushing setup
Head and hind toe brushing setup and whipping 6 vertical and 6 horizontal whippers

Type	Whipping
Capacity	According to customer needs
Dimensions	
Lengh	Dependent on capacity
Width	2600 mm / 102,36"
Side-rail min. heigh	2900 mm / 114,17"
Consumption	
Motor Power	Standard 3x400v/50Hz
Power Supply	Dependendt on capacity
Water Consumption	Dependendt on capacity

Type	Head & Hind Toe Brushing
Capacity	Max. 1,500 pig/hour
Dimensions	
Lengh	3610 mm / 144,13"
Width	2160 mm / 85,04"
Side-rail min. heigh	3200 mm / 125.98"
Consumption	
Motor Power	Standard 3x400v/50Hz
Power Supply	32A at 1,500 pigs/hour
Water Consumption	30 m³/hour at 1,500 pigs/hour

CONTACT

Frontmatec A/S
Mommarmvej 293-301
tandslet@frontmatec.com
+45 744 076 44